



BAKER/FLINK 550 REVERSIBLE PLOW

THE OPERATOR'S CHOICE!

Dependability, efficiency and durability are our traditional standards.



Sectional Trip Edge Design

- Multiple Independent Sections Trip when encountering unforeseen road obstructions
- Two Dual Spring, Reverse Wound Compression Spring Assemblies per trip section
- Adjustable Tension Trip per section
 - Adjustable for proper cutting edge attack angle to road surface

Flared Moldboard Ends

- Increase discharge of snow from curb
- Helps prevent over-riding of snow



Integral Shield

- Improves Operator Visibility
- Restrains Snow from Overriding
 - Aids discharge of snow to far end of moldboard

"TRIP CUTTING EDGE"

Originated and Patented by BAKER



BAKER/FLINK TRIP EDGE SNOW PLOW

The Next Generation!


Manufactured by Flink Company • 502 N. Vermillion St. • Streator, IL 61364
A PROVEN LEADER IN ICE AND SNOW REMOVAL EQUIPMENT



BAKER/FLINK 550 REVERSIBLE PLOW


SPECIFICATIONS

MODEL NUMBER	PLOW HEIGHT	MOLDBOARD THICKNESS	MOLDBOARD LENGTH		SECTIONAL CUTTING EDGES		NO. OF VERTICAL RIBS	PATH CLEARED		APPROX SHIP WEIGHT
			AT BOTTOM	AT TOP	5/8" X 6" x 2' LONG	5/8" X 6" x 3' LONG		AT 28°	AT 35°	
2PR559S	36"	3/16"	10'0"	10'10"	2	2	8	8'10"	8' 2"	1450
2PR559U	42"	3/16"	10'0"	10'10"	2	2	8	8'10"	8' 2"	1475
2PR554U	42"	3/16"	11'0"	12'0"	4	1	8	9'8"	9' 0"	1860

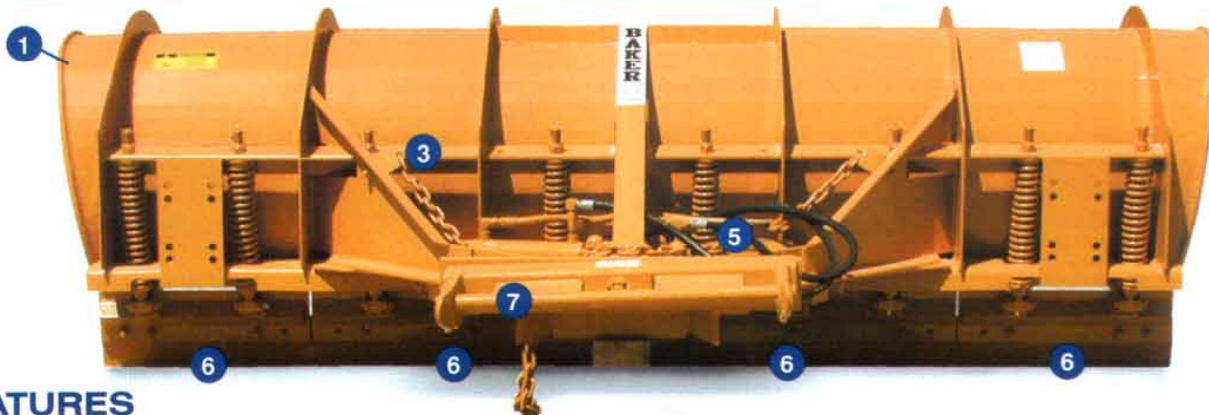

FEATURES


- 1 Rugged 3/16" plate paneled steel moldboard with 1/4" gussets and main deck; all welded construction. Flared at the top to increase discharge efficiency.
- 2 3" x 2-1/2" x 3/8" angle for top edge reinforcement.
- 3 3-1/2" x 3-1/2" x 1/2" mod-moldboard reinforcement and spring assembly support.
- 4 Heavy-duty, multi-position "A" frame allows reversing to desired angle.
- 5 Two double-acting power reverse cylinders.
- 6 Blade hinge weldments permit 3-14" wear from 6" cutting edge. Standardized in 2' and 3' lengths on reversibles.
- 7 Swivel bar allows plow to follow contour of road.

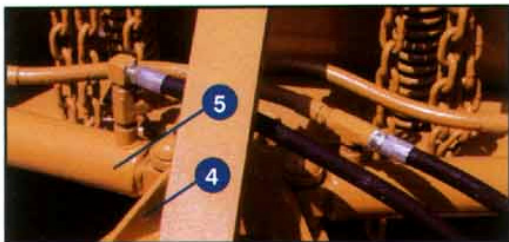

4 5 **Save time and labor with double-acting Ram Power Reverse!**
Power Reverse and heavy-duty "A" frame allows for infinite plow positioning from 0° to 35°.

OPTIONS:

- Caster Wheels (A)
- Wear Runners
- Pneumatic Tired Wheels
- Quick Link Swivel Bar (B)
- Tapered Rubber Deflectors
- Manual Angle
- Cutting Edge Shoes
- Jack Stand
- Universal Curb Guards (C)
- One-Piece Cutting Edge
- Cushion Valve

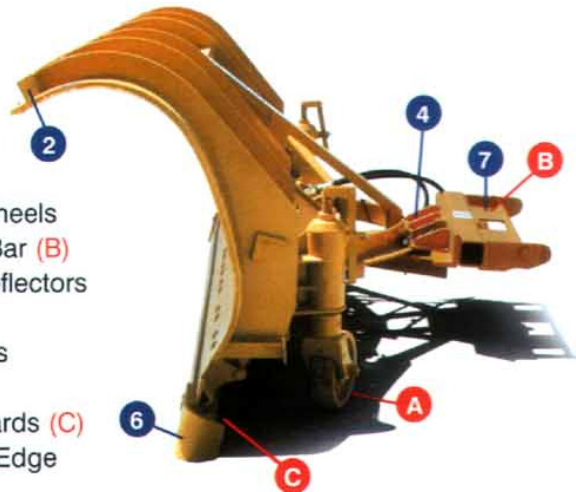

Manufactured by: **Flink Company**
Phone: 815/673-4321 • Fax: 815/672-2678
Email: info@flinkco.com
502 N. Vermillion St. • Streator, Ill 61364

Sales and Service By:

Specifications Subject to Change Without Notice